


# GoPresence Meeting 2



All-in-One videoconferencing bar: camera, microphone, and speaker in a single device

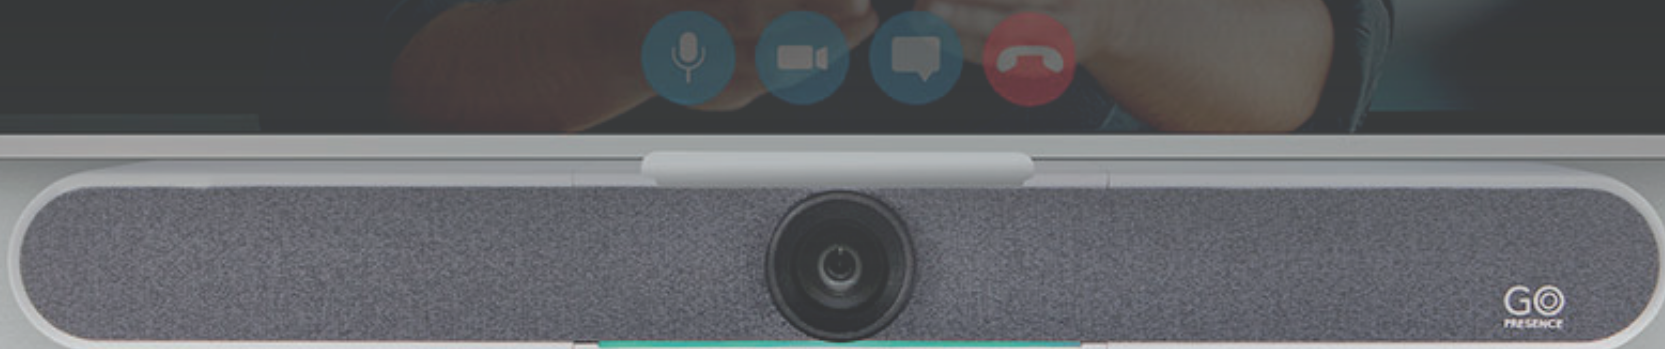


Pickup range of  
19.6 ft (6m)



UltraHD 4k  
resolution



Plug-and-Play  
USB connectivity



Artificial intelligence  
(auto framing)

A practical and organized solution featuring 6 highly sensitive **built-in microphones** and a **120° wide-angle** lens that covers every corner of the room.

The **4K resolution** delivers vivid details and vibrant colors, while the artificial intelligence enables **automatic framing**. It also features **built-in speaker** units.



## Key Features

### 4K Resolution and Wide Field of View

The Meeting delivers high-quality video with resolutions up to 4K. Its wide-angle lens covers an area of 120°, ensuring visual coverage of all participants, including those closest to the camera.

### Flexible USB Connectivity

To use the Meeting, simply connect it to your computer using the USB cable — no need to install drivers or additional software. It is fully compatible with the market’s leading videoconferencing applications.

### Audio Capture and Speakers

Equipped with six MEMS microphones for precise audio capture up to 19.6 feet (6 meters) and two 10W speakers for an exceptional audio experience.

### Artificial Intelligence



Speaker Tracking that automatically highlights the active speaker and auto framing, that frames all meeting participants without requiring manual adjustments.

### Adaptable to Your Environment

The universal base allows for use on tables, TV mounts, or wall installation, eliminating the need for extra accessories.

### Expand the Audio Capture

Enhance audio pickup with two expansion microphones with premium fabric finish. Each microphone captures up to 9.8 feet (3 meters) and includes a mute button.

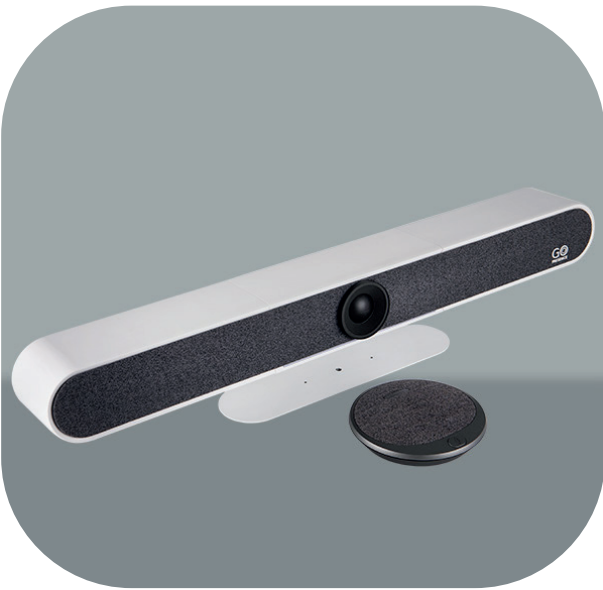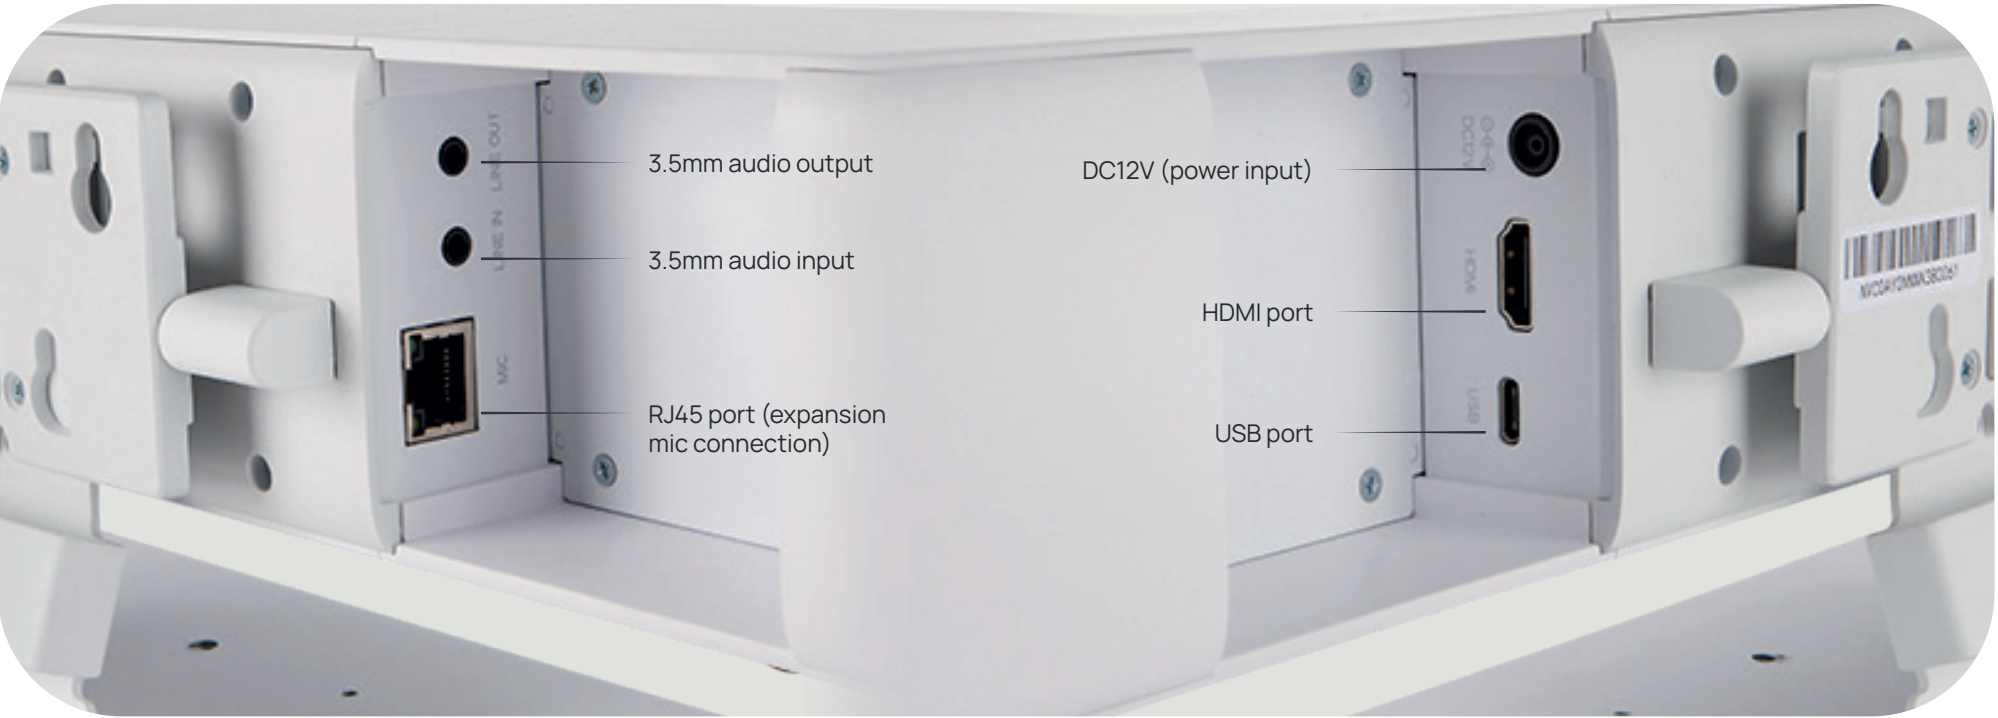

## Technical Specifications

### Camera

- **Dimensions:** 28.6 x 4.9 x 4.2 inches (727 x 125 x 107 mm)
- **Weight:** 6.3 lbs (2,9 kg)
- **Sensor:** SONY CMOS 8 megapixel
- **Field of View:** 120° (D) - 106° (H) - 72° (V)
- **Aperture:** F2.0
- **Minimum Illumination:** 0.5 Lux
- **Digital Zoom:** 10X
- **Video Resolution via USB and HDMI:**
  - 4K Ultra HD – 2160p at 30FPS
  - Full HD – 1080p at 30FPS
  - HD – 720p at 30FPS
- **AI Features:** Facial detection (Auto Framing), sound source localization, and voice tracking (Speaker Tracking)
- **Fixed Lens:** ePTZ, 10X
- **Noise Reduction (DNR):** 2D & 3D
- **Backlight Compensation (BLC):** On/Off
- **SNR:** ≥ 50dB
- **Lens Privacy Cover:** Automatic
- **Video Adjustments:** Brightness, Sharpness, Saturation, Contrast, White Balance, Gain, Anti-Flicker, Low Brightness Compensation, Exposure
- **Video Compression Format:** YUY2, MJPG, NV12, H.264
- **LED Indicator:** Green, Red, and Blue

### Speaker

- **Output Power:** 2 x 10 W
- Stereo Speakers
- 2 Full-range speakers with 2 integrated passive radiators
- **Volume Level:** 90 dB (Maximum)
- **Sound Pressure Level:** 80 ± 3 dB at 1.0 M / 1.0 W
- **Frequency Response:** 100 Hz - 20 kHz

### Built-in Microphones

- **Microphone Type:** 6 MEMS (Microelectromechanical Systems)
- **Pickup Range:** 19.6 feet (6 meters)
- **Frequency Response:** 120 Hz - 16 kHz
- **Audio Processing:**
  - AEC (Acoustic Echo Cancellation)
  - AGC (Automatic Gain Control)
  - ANS (Acoustic Noise Suppression)
  - Sound Source Localization

### Expansion Microphones\*

- **Dimensions:** 5.1 x 5.1 x 1.2 inches (132 x 132 x 31 mm)
- **Features:** Echo and noise cancellation
- **Pickup Range:** Additional 9.8 feet (3 meters)
- **Frequency Response:** 120 Hz - 16 kHz
- **Connection:** RJ45 port for 2 expansion microphones
- **Mute Button:** Included
- **LED Indicator:** Red and Green
- **Audio Processing:** AEC (Acoustic Echo Cancellation), AGC (Automatic Gain Control), ANS (Acoustic Noise Suppression)  
\*sold separately

### Warranty

- 2-year warranty

### Interface

- **Compatible Operating Systems:** Windows 7, 8.1, Windows 10 or higher, macOS 10.10 or higher, Chrome OS™, Linux
- **USB Interface:** 1x USB-C 3.0 - 6.5 feet (2 meters)
- **External Audio Interface:** 3,5mm Input and Output
- HDMI port
- **Power Adapter Input:** AC 110-240 V ~ 50-60Hz 0.8A (Bivolt)
- **Power Adapter Output:** DC 12V / 2.0A (24.0 W)
- Wall Mount Support Integrated
- **Tripod Mounting:** 1/4" screw hole

### Optional Accessories

- Kensington Lock Adapter Kit
- Expansion Microphones
- VESA Standard TV Mount

### Box Contents

- 1 x GoPresence Meeting Camera
- 1 x USB-C 3.0 Cable - 6.5 feet (2 meters)
- 1 x Remote Control (2 x CR2032 Batteries)
- 1 x Power Supply
- 1 x Mounting Screw Kit